

SLZ11-14

- DIN rail adapter for S7-300 Simatic rails



Data sheet

SLZ11-14 adapters allow mounting PULS switched mode power supplies or other DIN rail units on the S7-300 rail, which differs from other rails. Thus, a separate DIN rail is not necessary anymore. The adapter consists of a mounting bracket which is put onto the S7-300 rail and fixed at the lower edge with two

screws which are included. The DIN rail power supply or any other device can then be mounted on a DIN rail piece of sufficient length fixed on this mounting bracket. The adapters are available in various widths for different unit sizes (see table below).


Technical data and scope of delivery

- | | |
|-------------------------|--|
| • Thickness of material | 1.5mm |
| • Kind of material | steel plate, passivated in chromatic acid (zinc coating) |
| • Scope of delivery | - S7 adapter + DIN rail (mounted)
- Screws |

Table of dimensions A...C (mm)

	SLZ11	SLZ12	SLZ13	SLZ14
e.g. for	SL2.100	SL5.100	SL5.300, SL10.300	SL10.100
A	51	66	90	121
B	35	50	74	105
C	36	36	60	86

Dimensions and distances

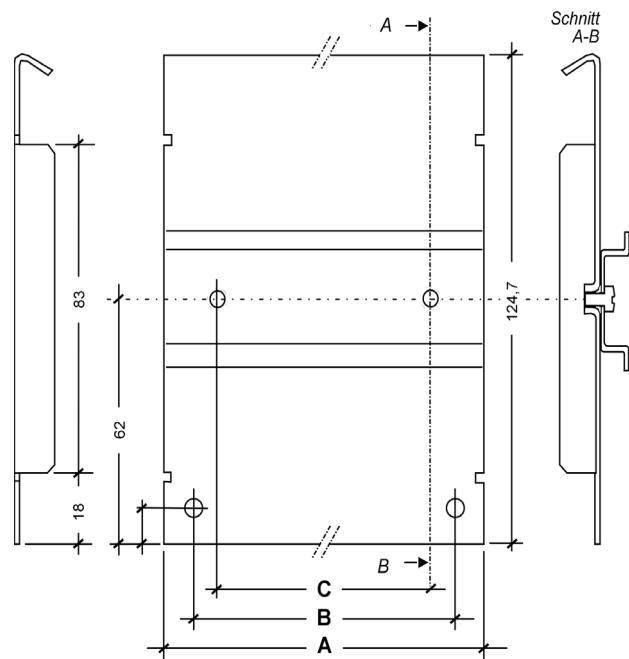

Order information

Order number	Description
SLZ11	51mm width, e.g. for SL2.100
SLZ12	66mm width, e.g. for SL5.100
SLZ13	90mm width, e.g. for SL5.300, SL10.300, etc.
SLZ14	121mm width, e.g. for SL10.100

Your partner in power supply:



PULS GmbH
Arabellastraße 15
D-81925 München
Tel.: +49 89 9278-0
Fax: +49 89 9278-199
www.puls-power.com